

# Shaker

## Low-temperature shaking dyeing tester



DL-2003 (2 Bath)




### Feature

- Easy to operate unicontroller in incorporating temperature control and shaking control.
- Ensures precise testing with a pre-settable digital timer.
- Soft start and brake by inverter not to overload driving motor.
- Noiseless driving axle.
- Equipped with door shock absorber for operator convenience.
- Corrosion resistance bath plate, flask holder plate and easy cleaning.
- Soaping available.
- Cotton, Wool, A/W dyeing.
- Selectable various baths.
  - 30 x 1 bath, 16 x 2 bath, 30 x 2 bath, 50 x 2 bath.



DL-2003 (1 Bath)

### ACCESSORIES

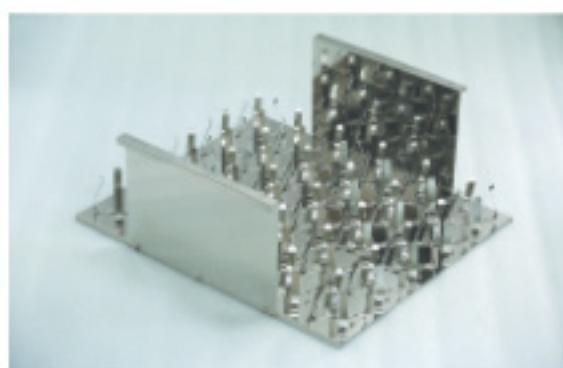

Flask holder plate



Controller (1 Bath)



Control panel (2 Bath)

### Specification

Model	DL-2003 (30 x 1 Bath)	DL-2003 (16 x 2 Bath)	DL-2003 (30 x 2 Bath)
Flask holder	250ml x 30ea	250ml x 32ea	250ml x 60ea
Temp. controller	Digital PID type	7" Color touch panel	7" Color touch panel
Temp. range		25~99℃	
Reciprocating speed		25~200r/min.	
Stroke		30mm	
Material		Internal - SUS#304 polishing External - SUS#304 H/L	
Test timer	Digital 99min. 59sec.	Digital 99min. 59sec.	Digital 99min. 59sec.
Heater capacity	4000W	8000W	8000W
Drive Motor	100W (Inverter control)	100W (Inverter control)	100W (Inverter control)
Power source	220VAC 50/60Hz single phase, 4.5kW	220VAC 50/60Hz single phase, 8.5kW	220VAC 50/60Hz single phase, 8.5kW
Weight (Approx.)	75kg (±2kg)	140kg (±5kg)	175kg (±5kg)
Dimension (Approx.)	1170(W) x 750(D) x 550(H)mm	1450(W) x 700(D) x 1110(H)mm	1780(W) x 790(D) x 1110(H)mm