

Measuring/Wrap Reel




DL-3028



ISO QUALITY SYSTEM CERTIFICATION

Feature

- Automatic stop of test by digital preset counter.
- Easy to remove the hank of yarn from reels by bend mechanism after winding and convenient operation.
- Equipped with speed controller.
- Soft start and brake by motor controller.
- Standard : ISO 2060, ASTM D1907

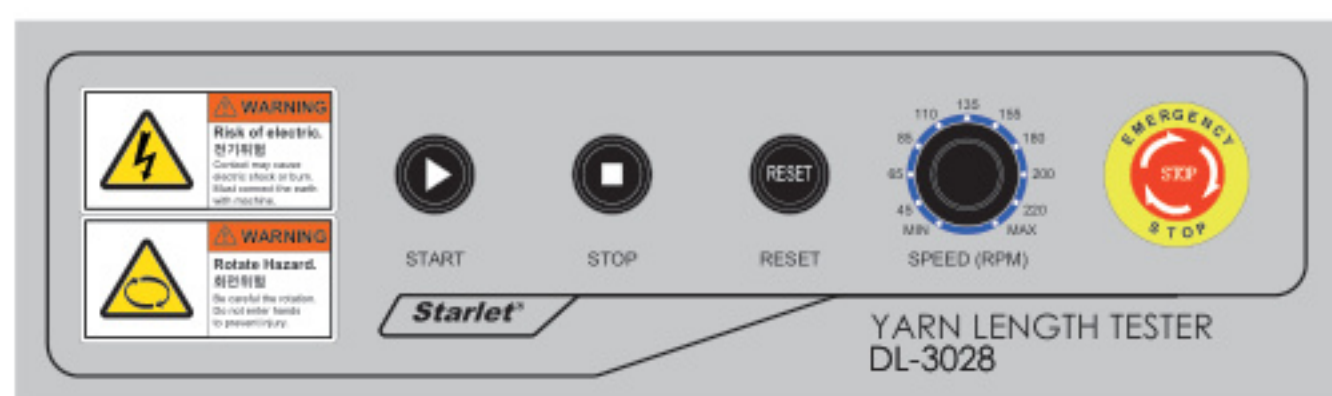


Control panel



Counter



Bend mechanism

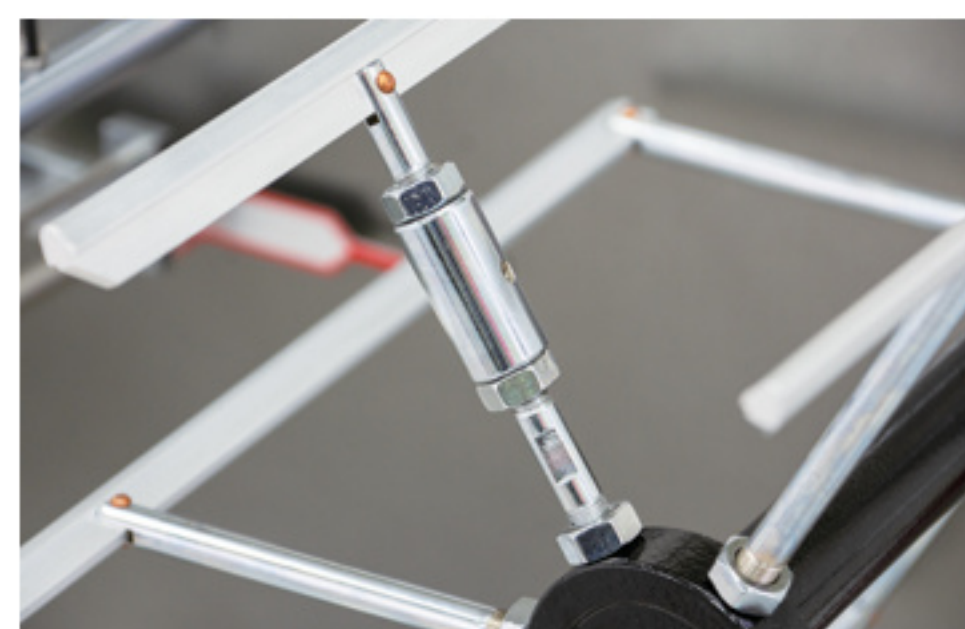

Length control handle



Handle



Tension balance

Specification

| Model | DL-3028 |
|---------------------|--------------------------------------|
| Reel girth | 1000mm±0.5mm |
| Reeling circle | 1~9999 LED |
| Reel speed | 30~250rpm (Step less variable speed) |
| Pre-tension | 0~100cN |
| Guide bar travel | 35mm |
| Bobbin number | 1~6 |
| Operating noise | 50dB |
| Reel motor | 50W |
| Power source | AC 220/230V 50/60Hz, 1-phase |
| Weight (Approx.) | 62kg (±2kg) |
| Dimension (Approx.) | 750(W) X 620(D) X 535(H)mm |